



DMS-OUT OWNER'S MANUAL



Overview:

The DMS-OUT provides 3rd Party devices access to the streaming sources in a DMS Audio Network. This device is the perfect solution for adding any new/existing AVR, soundbar, or other audio device to a DMS Audio Network.

Online Help:

www.urcportal.com

For software downloads, training materials, and frequently asked questions.

Contact Support:

Total Control is a URC product sold direct to Authorized Dealers. For questions or assistance, contact your custom installer/programmer or URC Technical Support at techsupport@universalremote.com

Universal Remote Control, Inc.

500 Mamaroneck Ave

Harrison, New York 10528

Toll Free: (800) 901-0800

Main: (914) 835-4484



TABLE OF CONTENTS

Features and Benefits.....	1
Parts & Pieces.....	2
Requirements.....	2
Rear Panel Description.....	3
Top Panel & LED States.....	6
Bottom Panel Description.....	7
Wiring the DMS-OUT.....	8
Specifications.....	9
Limited Warranty Statement.....	9
End User Agreement.....	11
Federal Communication Commission Interference Statement.....	11
FCC Caution.....	12

Features and Benefits:

The DMS-OUT is loaded with features designed to provide the best audio experience. Enjoy features such as:

- **3rd Party Room Linking:** When connected to a 3rd Party AVR, the DMS-OUT allows this device to become a DMS Zone. All DMS Zones provide the ability to link zones together and control a single menu for volume of individual or all linked zones.
- **Fixed or Variable Output Settings:** The DMS-OUT allows for fixed or variable volume control. When set to variable the 3rd party AVR controls the audio level settings. When set to fixed the DMS-OUT controls the audio level settings.
- **3rd Party Volume Pop-Up:** In conjunction with supported 3rd Party AVRs, the DMS-OUT creates a basic and simple volume pop-up menu that provides real time two-way feedback and control of volume and mute.
- **3rd Party Audio Device Integration**
DMS-OUT grants 3rd party devices the ability to use sources that are available from DMS Audio Streams.
- **Flexible Power Source**
Use the supplied 5V DC power adapter or take advantage of the DMS-OUT's PoE (**P**ower **o**ver **E**thernet) capability using CAT 5/6 wiring.




TOTAL CONTROL 2.0

Parts & Pieces:

Contained within the DMS-OUT box:

- 1x DMS-OUT device
- 1x Wall Mount
- 1x 5V DC Power Adapter
- 4x Mounting Screws

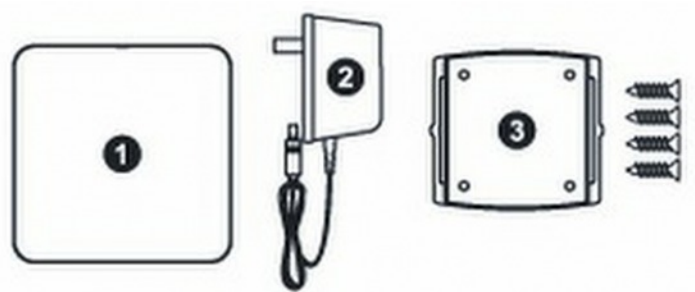

DMS Room Linking:

The DMS-OUT permits 3rd party AVRs to “link” with other DMS Zones. Doing so creates a volume pop-up menu providing feedback to control volume of all linked rooms as well as individual rooms.

Receive real-time two-way feedback on:


- Power Status
- Volume
- Mute Status

Requirements:

As with all Total Control products, the DMS-OUT is not a plug-and-play device. It requires programming by a certified Total Control programmer to function properly.

Be sure the system contains at least one (1) of the following:

- **MFS-8** or **MFS-POE8**
- **MRX Advanced System Controller**
- **URC Interface** (TRC, TKP, or URC Mobile 2.0 devices)

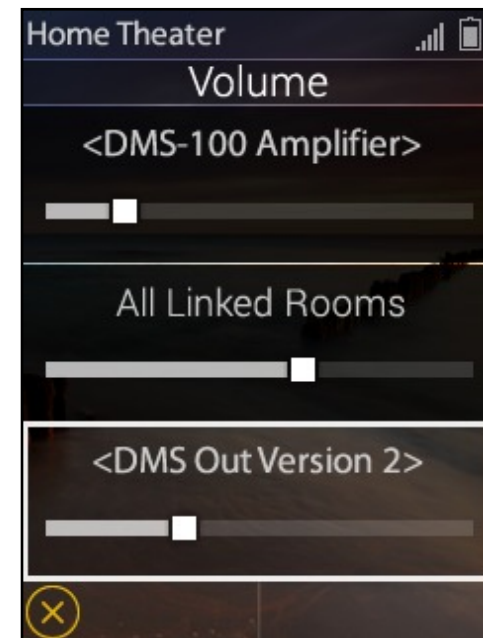

Rear Panel Description:

The following section defines all the outputs available on the rear panel of the DMS-OUT.

5V DC Input:

Provides power to the DMS-OUT. PoE may be used as a substitute.



Analog Output:


Standard RCA out (analog) connector.



Digital Output - Optical:

This input uses standard S/PDIF Optical TOSLINK connector.

i The DMS-IN/OUT converts Dolby Digital 5.1/DTS 5.1 to a 2.0 Stereo DMS Stream.

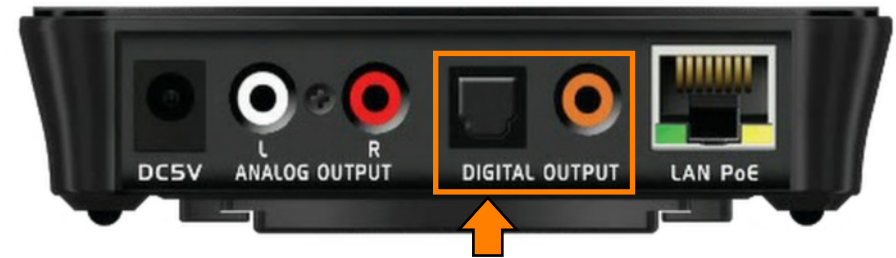

Digital Output - Coax:

Standard Digital Coax connector.

i The DMS-IN/OUT converts Dolby Digital 5.1/DTS 5.1 to a 2.0 Stereo DMS Stream.



LAN Port:

This 10/100 Ethernet port supports PoE and connects to the URC Audio streams on the local network. This is also how the DMS-OUT receives commands and sends audio.



The DMS-OUT does not support a wireless (Wi-Fi) network connection.



Top Panel & LED States:

There are three (3) LED lights at the top of the DMS-OUT which can provide users with basic and troubleshooting information.

Status LED:

- **Off:** Unit has not been programmed with a Total Control file.
- **Yellow:** Unit has been programmed with a Total Control file; however, it is not creating a DMS Audio Stream.
- **Blue:** Unit has been programmed with a Total Control file and is creating a DMS Audio Stream through the network.

Power LED:

- **Off:** Unit is not receiving power.
- **Blue:** Unit is receiving power via 5V DC adapter or PoE.



Network LED:

- **Off:** Unit is not connected to the local area network (LAN) and cannot receive data.
- **Blinking Green:** Unit is connected to the local network (LAN), but has not received an IP address.
- **Green:** Unit is connected to the local network (LAN) and has an IP address.

Bottom Panel Description:

Located beneath the DMS-OUT is a **Reset** button. This button is recessed so use a paperclip or something similar to press the button.

- **Rebooting the DMS-OUT:** A momentary press of the **Reset** button reboots the DMS-OUT, similar to unplugging it from the power supply.
- **Factory Default:** Press and hold the **Reset** button for **10 seconds** or longer to default the unit. If factory defaulted the DMS-OUT requires re-programming.



Wiring the DMS-OUT:

Follow these steps to prepare the DMS-OUT for programming:

1. **Power the DMS-OUT** with the supplied 5V DC adapter OR using PoE through the LAN port.
2. **Connect the Ethernet cable** from the LAN 10/100 port to an LAN port (1-8) **MFS-8/MFSPOE-8**
 - 5V DC adapter is **not required** when using PoE.



3. **Connect the DMS-OUT** to a 3rd party device via analog or digital connection.

Only one (1) output can be used at a time. Additional set up is required via the Accelerator 2.0 software. Contact a certified Total Control Installer to properly configure the DMS-OUT to a new or existing system.

TOTAL CONTROL 2.0

Specifications:

Network: One 10/100 Ethernet port (PoE)

Weight: 5.8 oz

Size: 4.6" x 4.6" x 1.2"

Power: Standard PoE Injector or PoE Switch (purchased separately), DC 5V/1A

Limited Warranty Statement:

1. **Limited Warranty and Disclaimers**

Universal Remote Control, Inc. ("URC") warrants that the URC equipment shall be free from defects in material and workmanship under normal usage for one (1) year from purchase when such is purchased from URC. **This limited warranty is valid only in the United States of America.** URC warrants that the software will substantially conform in any material respect to its functional specifications at the time of delivery. URC SHALL NOT BE LIABLE FOR OPERATIONAL, TECHNICAL OR EDITORIAL ERRORS AND/OR OMISSIONS MADE IN THE URC DOCUMENTATION. URC DOES NOT WARRANT THAT THE URC SOFTWARE IS BUG-FREE OR ERROR FREE OR THAT THERE ARE NO ERRORS/BUGS IN THE URC SOFTWARE.

URC warrants that at the time of purchase the URC equipment and the URC software complied with all applicable regulations and policies of the Federal Communications Commissions ("FCC") regarding electromagnetic interference caused by electronic/computing devices and to the extent that the URC equipment and/or the URC software fails to so comply, URC shall, at its own expense, take all reasonable measures to promptly cause such to comply.

URC equipment purchases from other than an authorized URC dealer or distributor are without warranty.

THIS LIMITED WARRANTY DOES NOT COVER TECHNICAL ASSISTANCE FOR HARDWARE OR SOFTWARE USAGE EXCEPT AS EXPRESSLY PROVIDED FOR HEREIN, THE EQUIPMENT, SOFTWARE AND DOCUMENTATION OF URC ARE SUPPLIED "AS IS" WITHOUT ANY WARRANTY, EXPRESS, STATUTORY OR IMPLIED, OF ANY KIND. TO THE MAXIMUM EXTENT PERMITTED BY APPLICABLE LAW, URC EXPRESSLY DISCLAIMS ALL WARRANTIES, EXPRESS, STATUTORY OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. URC DOES

TOTAL CONTROL 2.0

NOT WARRANT, GUARANTEE, OR MAKE ANY REPRESENTATIONS REGARDING THE USE OF, OR THE RESULTS OF THE USE OF, THE EQUIPMENT, SOFTWARE OR DOCUMENTATION IN TERMS OF CORRECTNESS, ACCURACY, RELIABILITY OR OTHERWISE. EXCEPT AS EXPRESSLY PROVIDED FOR HEREIN, TECHNICAL SERVICES ARE SUPPLIED "AS IS", WITHOUT ANY WARRANTY, EXPRESS, STATUTORY OR IMPLIED, OF ANY KIND. TO THE MAXIMUM EXTENT PERMITTED BY APPLICABLE LAW, URC EXPRESSLY DISCLAIMS ALL WARRANTIES, EXPRESS, STATUTORY OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE WARRANTIES OF QUALITY OR REASONABLE SKILL AND CARE, OR OUTCOME OR RESULTS.

WITHOUT IN ANY WAY LIMITING THE GENERALITY OF THE OTHER PROVISIONS HEREIN, WARRANTY DOES NOT COVER: (I) DAMAGE FROM MISUSE, NEGLIGENCE OR ACTS OF NATURE, (II) MODIFICATIONS, (III) INTEGRATION WITH THIRD PARTY CONTENT (IV) BEYOND THE WARRANTY PERIOD AND/ OR FAILURE TO FOLLOW URC WARRANTY CLAIM PROCEDURE.

The warranty limitations and warranty disclaimers may not apply to end user in whole or in part, where such are restricted or excluded by applicable law and such shall apply to the maximum extent permitted by applicable law.

In the event of any warranty claim, URC will, at its sole option, repair the URC equipment using new or comparable rebuilt parts, or exchange the URC equipment for new or rebuilt equipment. In the event of a defect, these are the end user's exclusive remedies.

All the URC equipment returned for service, exchange or repair require an RGA number. To obtain an RGA number, you must complete a Return Request Form which you may obtain by calling (914) 835-4484 or contacting URC at returnrequest@universalremote.com. To obtain warranty service, end user must deliver the URC equipment, freight prepaid, in its original packaging or packaging affording adequate protection to URC at 37 Ramland Road, Unit

104, Orangeburg, NY 10962. It is end user's responsibility to backup any macro programming, artwork, software or other materials that may have been programmed into the unit. It is likely that such data, software, or other materials will be lost during service and URC will not be responsible for any such damage or loss. A dated purchase receipt, bill of sale, installation contract or other verifiable proof of purchase is required. For the URC equipment support and other important information, please visit URC's website available at www.universalremote.com or call the Customer Service Center at (914) 835-4484.

This limited warranty only covers the URC equipment issues caused by defects in material or workmanship during ordinary consumer use. It does not cover product issues caused by any other reason, including but not limited to product issues due to commercial use, acts of God, third-party installation, misuse, limitations of technology, or modification of or to any part of the URC equipment. This limited warranty does not cover the URC equipment sold as used, as is, refurbished, so called "B stock" or consumables (such as batteries). This limited warranty is invalid if the factory applied serial number has been altered or removed from the URC equipment. **This limited warranty specifically excludes the URC equipment sold by unauthorized resellers.**

With the exception of URC's IR-only, broad-based consumer remotes, none of URC's PC programmable remotes or any of our Total Control® whole-house equipment are authorized for online internet sales. Buying URC's PC programmable remotes or any of our Total Control® whole-house equipment online means buying equipment that does not have URC's limited warranty. Such equipment is not eligible for URC tech support or software support, either.

TOTAL CONTROL 2.0

2. **URC's LIMITATION OF LIABILITY**

IN NO EVENT SHALL URC BE LIABLE FOR INDIRECT, SPECIAL, INCIDENTAL, EXEMPLARY, PUNITIVE OR CONSEQUENTIAL DAMAGES OF ANY KIND OR LOSS OF PROFITS OR BUSINESS OPPORTUNITY, EVEN IF URC IS ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

IN NO EVENT SHALL URC BE LIABLE FOR LOSS OF OR DAMAGE TO DATA, COMPUTER SYSTEMS OR COMPUTER PROGRAMS.

URC'S LIABILITY, IF ANY, FOR DIRECT DAMAGES OF ANY FORM SHALL BE LIMITED TO ACTUAL DAMAGES, NOT IN EXCESS OF AMOUNTS PAID BY END USER FOR THE URC EQUIPMENT.

IN NO EVENT SHALL URC BE LIABLE FOR ANY EVENTS BEYOND ITS CONTROL, INCLUDING ANY INSTANCE OF FORCE MAJEURE.

IN NO EVENT SHALL URC BE LIABLE FOR THE ACTS OR OMISSIONS OF END USER OR ANY THIRD PARTY.

THE LIMITATIONS OF LIABILITY MAY NOT APPLY TO END USER IN WHOLE OR IN PART, WHERE SUCH ARE RESTRICTED LIMITED OR EXCLUDED BY APPLICABLE LAW AND SUCH SHALL APPLY TO THE MAXIMUM EXTENT PERMITTED BY APPLICABLE LAW.

URC SHALL NOT BE HELD RESPONSIBLE FOR THE STATEMENTS MADE BY OTHERS.

SOME STATES OR JURISDICTIONS DO NOT ALLOW THE EXCLUSION OR LIMITATION OF INCIDENTAL OR CONSEQUENTIAL DAMAGES, OR ALLOW LIMITATIONS ON HOW LONG AN IMPLIED WARRANTY LASTS, SO THE ABOVE LIMITATIONS OR EXCLUSIONS MAY NOT APPLY TO END USER. THIS LIMITED WARRANTY GIVES END USER SPECIFIC LEGAL RIGHTS AND END

USER MAY HAVE OTHER RIGHTS WHICH VARY FROM STATE TO STATE OR JURISDICTION TO JURISDICTION.

End User Agreement:

The terms and conditions of the End User Agreement available at <https://www.universalremote.com/end-user-agreement/> shall apply.

Federal Communication Commission

Interference Statement:

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one more of the following measures:

- Reorient or relocate the receiving antenna
- Increase the separation between the equipment and receiver
- Connect the equipment into an outlet or a circuit different from that to which the receiver is connected
- Consult the dealer or an experienced radio/TV technician for help

TOTAL CONTROL 2.0

Warning!

Changes or modifications not expressly approved by the manufacturer could void the user's authority to operate the equipment.

Note: The manufacturer is not responsible for any Radio or TV interference caused by unauthorized modifications to this equipment. Such modifications could void the user's authority to operate the equipment.

FCC Caution:

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Any changes or modifications not expressly approved by the party responsible for compliance could void the authority to operate equipment.