



Total control

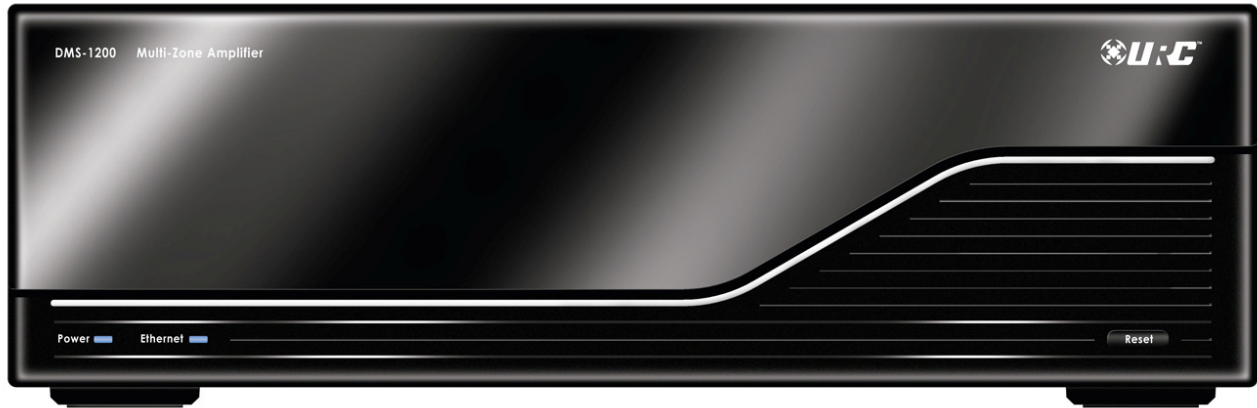


DMS-1200

Multi-zone Amplifier

Eight (8) zones ■ 50 watts per channel for zones 1 through 6; preamp only for zones 7 and 8
■ Expandable up to 32 zones ■ Four (4) Analog-to-Digital inputs that stream to other DMS amps ■ Can be programmed off premises via the internet and MRX-10 ■ Easy rack-mounting via optional RMK-3 rack mounting kit

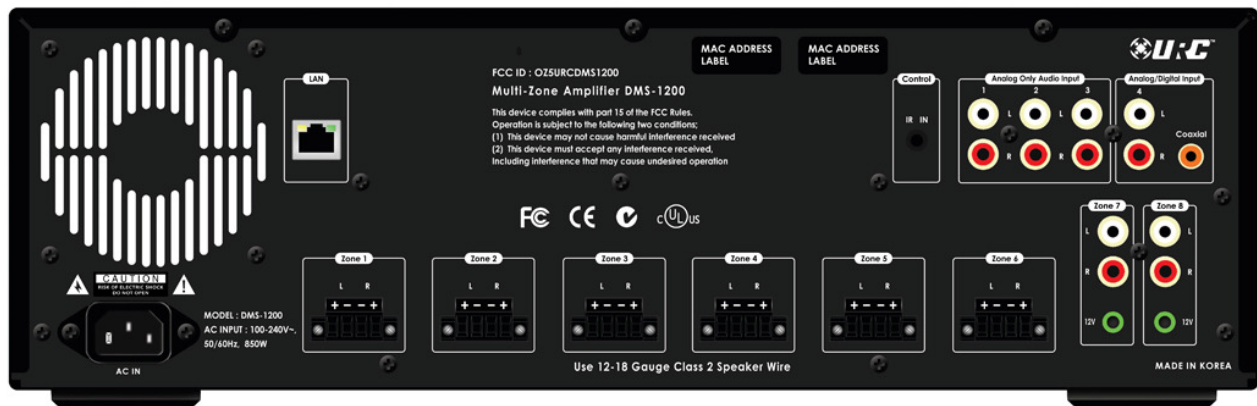

DMS-1200 Multi-zone Amplifier

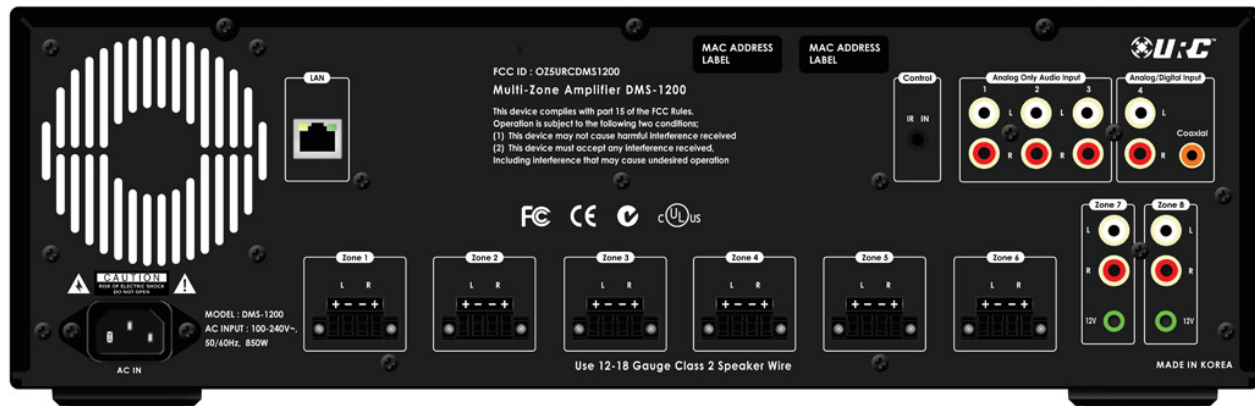

specifications

* Network	One 10/100 Ethernet port (Indicator 2LED)
* IR One Way & IP Two Way Control	YES
* Indicators	1 Power BLUE LED - Blink when resetting / 1 Network BLUE LED Indicates
* Zones of Stereo Audio	Eight: six Powered Zones, two preamp only zones
* Rated Wattage per Channel	50 watts per channel @ 8 ohms, stable to 4 ohms
* Automatic Low Volume Loudness Compensation	Installer Configured for Type and Size of Audio Zone
* Installer Configured EQ	Bass Boost, Treble Boost, 5-Band parametric EQ,
* Input sensitivity	600~2200mVp-p / 10Kohm*
* User Adjustable Audio Controls	Bass, Treble and Balance
* Receives All SNP and DMS Generated Streams	Yes
* Inputs	4 Stereo Line Inputs, ALL stream to all other DMS Amplifiers
* Zone 7 and 8 Preamp Output Options	Configurable to Fixed Line Level Output (external amplifier can be triggered by 12V trigger)
* Power Supply	AC 100~245V, 50/60Hz
* Power consumption	3~6A
* Maximum external Dimensions	5.25" x 17" x 16" (H x W x D)
* Weight	26.7 lbs. (12.1 Kg)