

6.5" Two-Way In-Ceiling Speakers




OVERVIEW

The SP-6LE is engineered to provide superior acoustic performance, sleek aesthetics and fast installation. With our revolutionary clamping system and easy wire connectivity, the SP-6LE is a true tool-less architectural speaker. Simply connect the speaker wire to the removable terminal, install the speaker into the cut-out and then push down the levers to engage the clamps to the drywall. The unique clamping system locks the speaker in place. That's it!

A speaker install that takes seconds. No more balancing act on top of a ladder with a screw gun in one hand and the speaker in the other.

HIGHLIGHTS

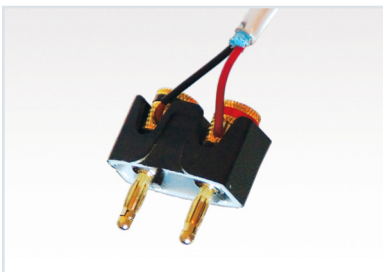

Removable speaker wire terminal.



Unique, patented clamp system allows for easy installation and removal.

SPECIFICATIONS

- Speaker Type:** In-ceiling, two-way round speaker
- Woofer:** 6.5" polypropylene woofer
- Tweeter:** 1" silk dome swivel tweeter
- Power Handling:** 5-100 watts
- Nominal Impedance:** 8 ohms
- Frequency Response:** 50-20 kHz
- Sensitivity:** 91 dB
- EQ Adjustments:** -3 dB, 0 dB, +3 dB (tweeter and woofer)
- Grill:** Frameless magnetic micromesh steel grill

DETAILS

- SKU:** SP-6LE, UPC 656787-600027
- Cutout Dimensions:** 8.15" (207mm)
- Ceiling Thickness:** 0.5" min - 1.0" max
- Finished Dimensions:** 9.45" Diameter (240mm), 3.98" Depth (101mm)
- Warranty:** Limited lifetime